





GENERAL SPECIFICATIONS

- Incremental measurement with Optical (ARC) or Magnetic (ARS) principle
- Resolution up to 20.000 pulses for Optical (ARC) and 1024 pulses for Magnetic (ARS)
- 58 mm body diameter
- Different hollow options from 6 mm to 20 mm
- Optical (ARC): 6000 RPM, Magnetic (ARS): 3000 RPM operating speed
- 300 KHz response frequency
- High accuracy
- Robust structure, long operating life
- Connection with cable or connector
- IP54 protection class



The ARX B 58 series rotary encoders measure on an optical (ARC) or magnetic (ARS) principle and operate incrementally. The ARC series operating on the optical principle offers a resolution of up to 20.000 pulses per revolution and the ARS series operating on the magnetic principle up to 1024 pulses.

Optionally, different shaft diameters, cable lengths or socket versions can be requested.

APPLICATIONS

- Wind Applications / Power Plants
- Marine or Utility Vehicle Applications
- Press or Wood and Stone Processing Machinery
- Construction Machinery
- Cranes
- Offshore Applications
- Commercial Solar Plants
- Filling Plants
- Food & Beverage Applications
- Oil & Gas - Pipe Handling and Cranes




TECHNICAL SPECIFICATIONS

Resolution	ARC: Resolution options up to 20.000 pulses ARS: Resolution options between 1 and 1024 pulses						
Operating Speed	ARC: 6000 RPM, ARS: 3000 RPM max.						
Measuring Type	ARC: Optical, ARS: Magnetic						
Response Frequency	300 KHz						
Current Consumption	50 mA nominal						
Electrical Interface		PP	TTL	HTL	HPL	OCL	OCP
	Supply	10...30 VDC	5 VDC	10...30 VDC	5...30 VDC	The supply signal should not be lower than the output signal	
	Output	10...30 VDC PP	5 VDC TTL	5 VDC TTL	5...30 VDC PP	NPN Open Collector	PNP Open Collector
Output Signals	A, /A, B, /B, Z, /Z						
Output Current	100 mA max. (per channel)						
Electrical Connection	5 or 8x0,14 mm ² shielded cable, M16 / 8 pin male connector, M23 / 12 pin male connector						
Body Diameter	58 mm						
Hollow Diameter	Different hollow diameters from 6 mm to 20 mm						
Operating	-25...+85 °C						
Storage Temperature	-40...+100 °C						
IP Protection Class	IP54						
Material	Body: Aluminum						
	Shaft: Stainless Steel						

ELECTRICAL CONNECTIONS

SIGNAL	M16 (S16) MALE CONNECTOR PIN NO	M23 (S23) MALE CONNECTOR PIN NO	CABLE COLOR
A	1	5	YELLOW
/B	2	1	WHITE
+V	3	12-2	RED
0 V	4	10-11	BLACK
/A	5	6	BLUE
B	6	8	GREEN
/Z	7	4	GREY
Z	8	3	PINK


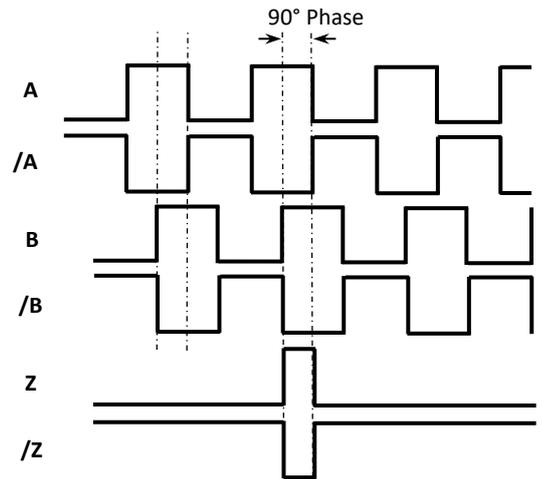


The table above shows the cable colors of the sensor output signals. If the control circuit is suitable in the Line Driver sensors of the not output signals (/A, /B, /Z) have to be added to the system. If it is not suitable /A, /B, /Z signal cables must be fixed as insulated separately. Don't forget that these edges have electricity too.

MECHANICAL DIMENSIONS (mm)



Standard Body - FZ Flange

M16 Connector From Backside

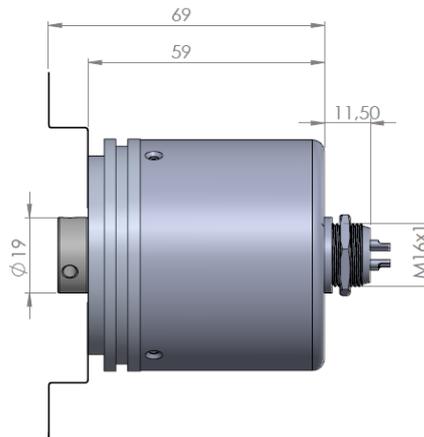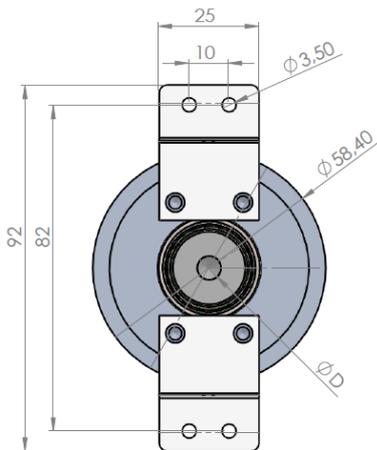


$\varnothing D$ 6 ... 20 mm

M23 Connector From Side

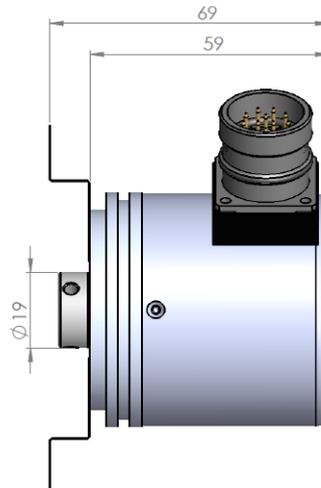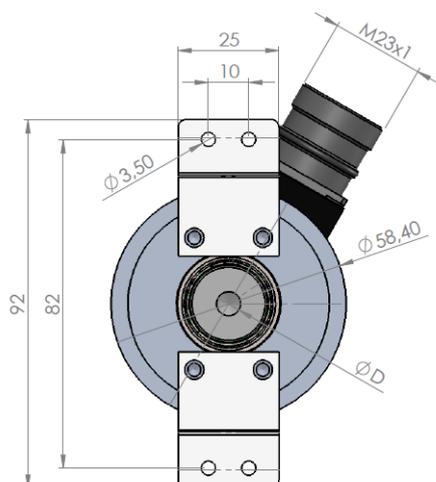


$\varnothing D$ 6 ... 20 mm

Cable From Backside

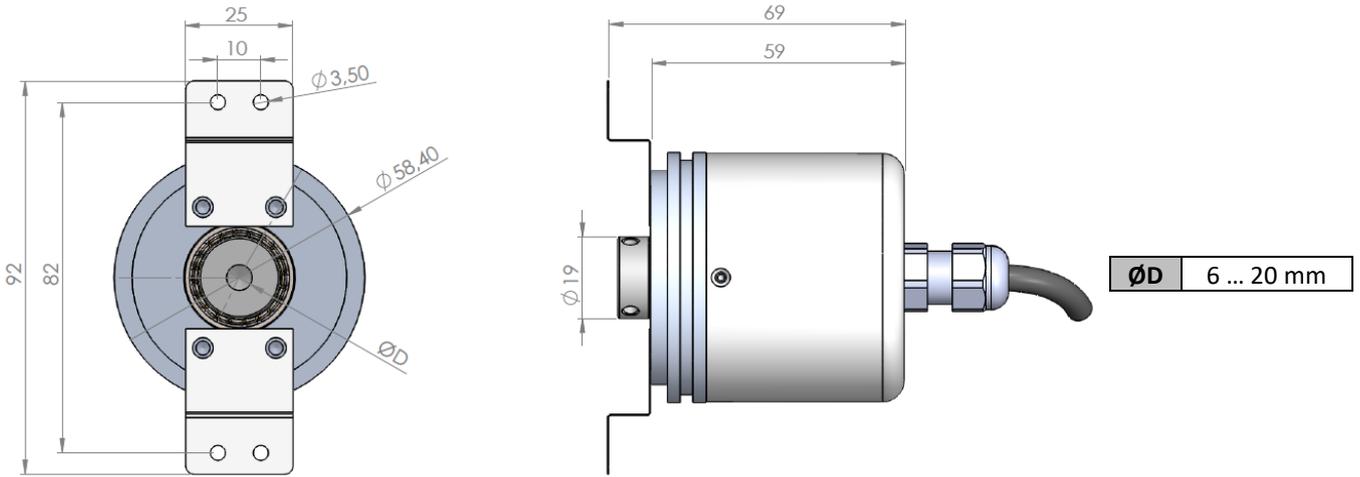


Cable From Side

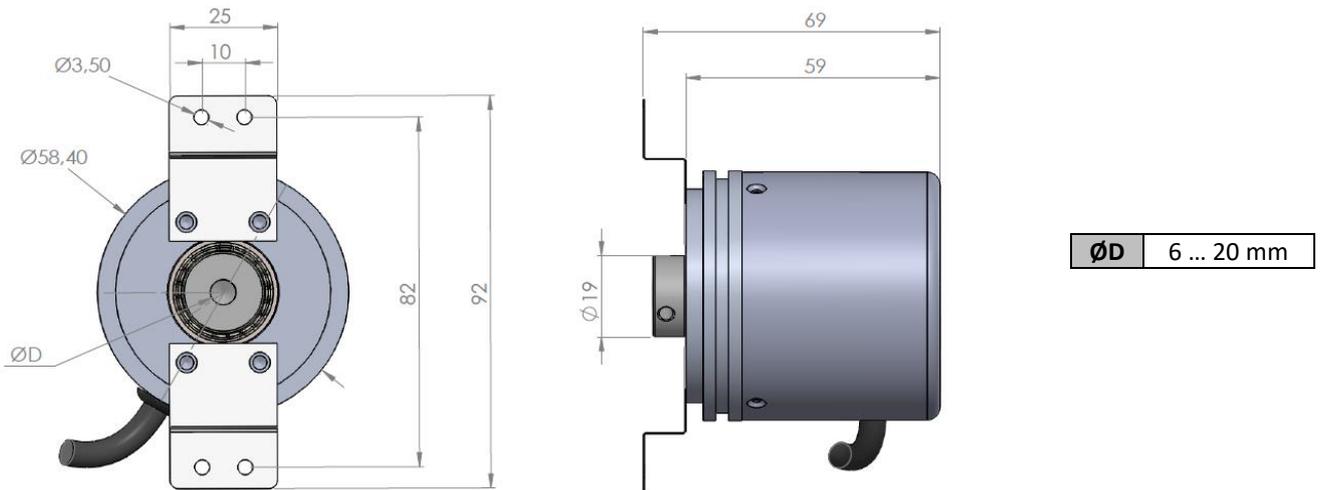


Standard Body - FC Flange

M16 Connector From Backside


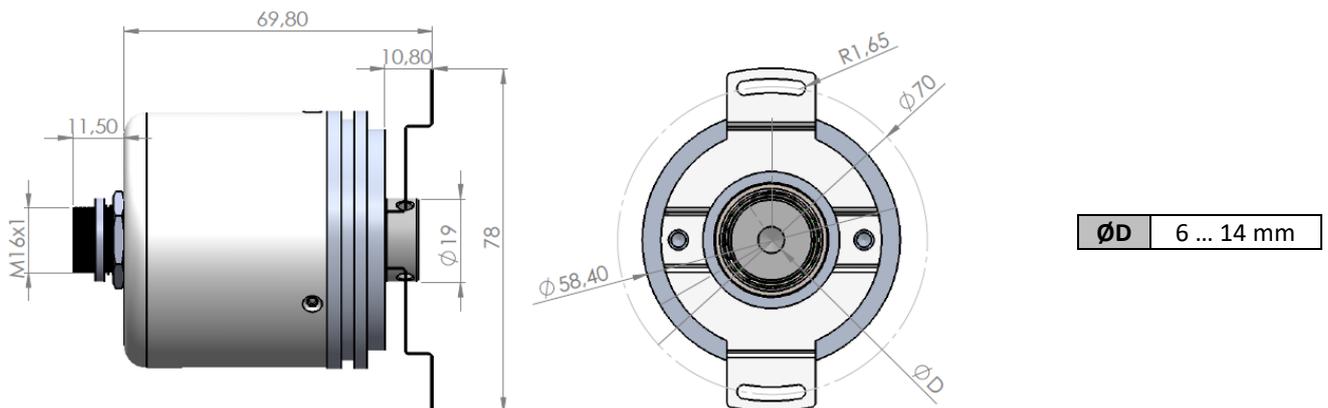


M23 Connector From Side

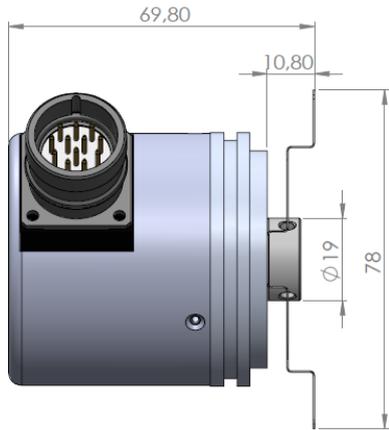



$\varnothing D$	6 ... 14 mm
-----------------	-------------

Cable From Backside

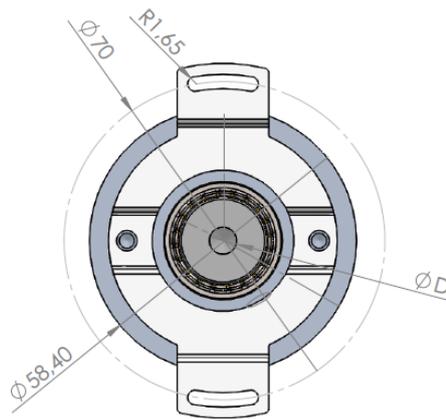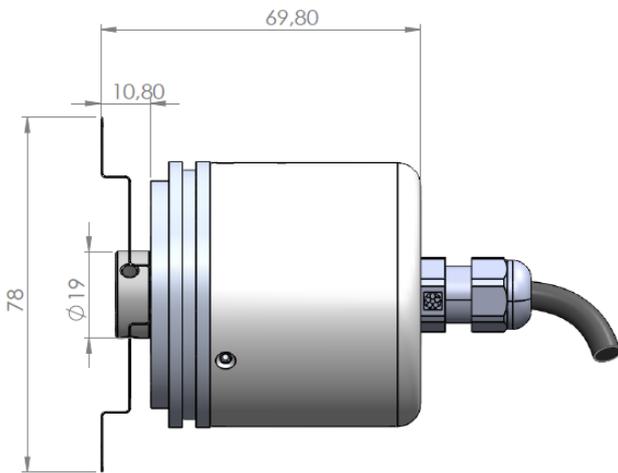

$\varnothing D$	6 ... 14 mm
-----------------	-------------

Cable From Side

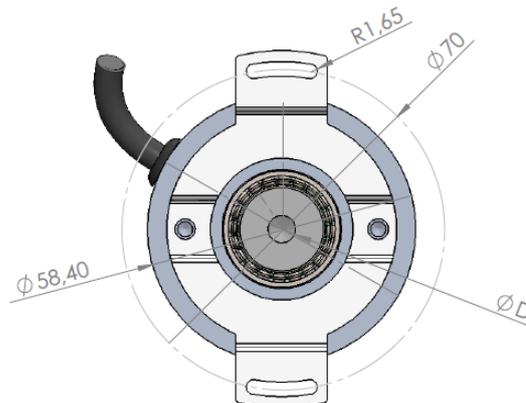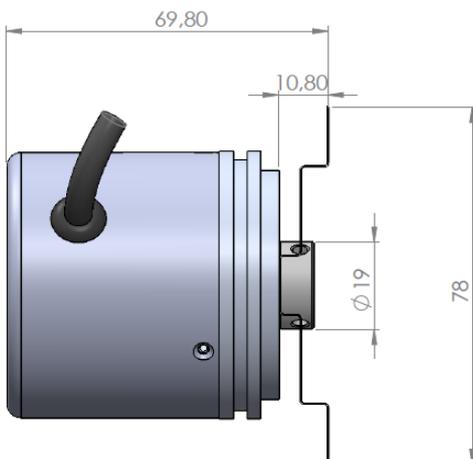

$\varnothing D$	6 ... 14 mm
-----------------	-------------

